




CABLE CONCRETE CLOSED CELL BLOCK SPECIFICATIONS

		CC 20	CC 35	CC 45	CC 70
		20 lbs. / s.f.	35 lbs. / s.f.	45 lbs. / s.f.	70 lbs. / s.f.
MAT	AREA	64 s.f. / 128 s.f.	64 s.f. / 128 s.f.	64 s.f. / 128 s.f.	64 s.f. / 128 s.f.
	WEIGHT	1280 lbs. / 2560 lbs.	2240 lbs. / 4480 lbs.	2880 lbs. / 5760 lbs.	4480 lbs. / 8960 lbs.
	BLOCKS/MAT	36 / 72	36 / 72	36 / 72	36 / 72
BLOCKS	SPACING @ BASE	0.5 in.	0.5 in.	0.5 in.	0.5 in.
	SPACING @ TOP	4.5 in.	4.5 in.	4.5 in.	4.5 in.
	WEIGHT	35.6 lbs.	62.2 lbs.	80.0 lbs.	124.4 lbs.
CABLE	LENGTH / WIDTH	LENGTH / WIDTH	LENGTH / WIDTH	LENGTH / WIDTH	LENGTH / WIDTH
	DIAMETER	1/8 in. / 1/8 in.	5/32 in. / 1/8 in.	5/32 in. / 1/8 in.	7/32 in. 5/32 in.
	CONSTRUCTION	1 x 19	1 x 19	1 x 19	1 x 19
	BREAKING STRENGTH	2100 lbs. / 2100 lbs.	3300 lbs. / 2100 lbs.	3300 lbs. / 2100 lbs.	6300 lbs. / 3300 lbs.

CABLE CONCRETE MAT DESIGN

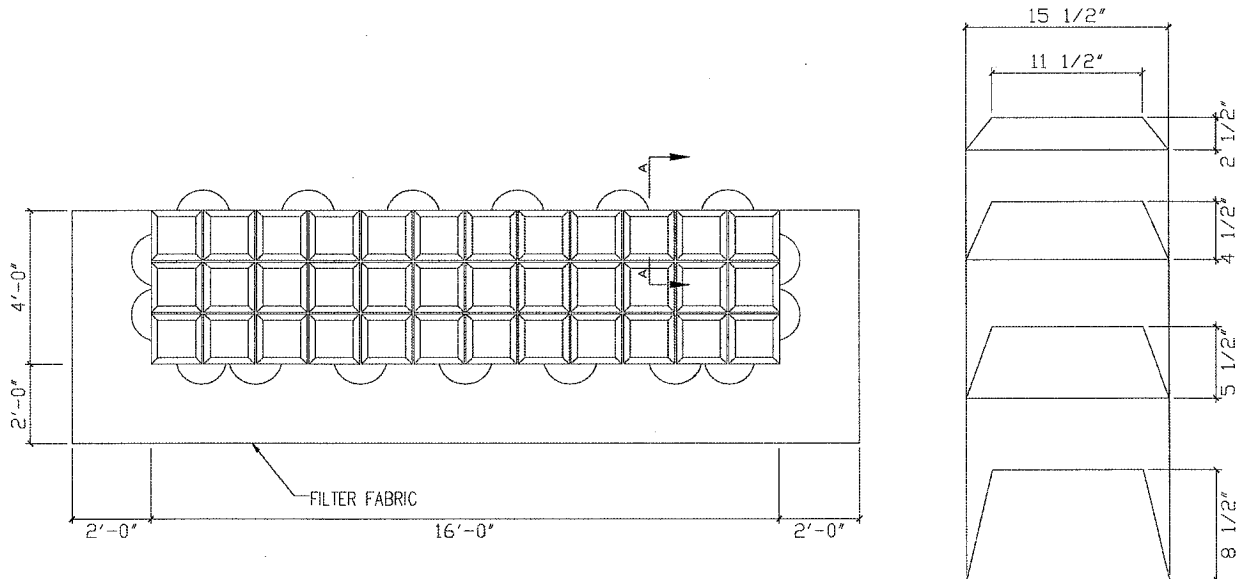

CABLE CONCRETE MAT